

SCANREX HVP

– One Component System



HVP100

HVP200

HVP400

Scanrex HVP series of pumps is the perfect choice when pumping high viscosity materials such as adhesives, sealants and greases. The material is pumped directly from the original container whether it's a 310ML cartridge, 20L bucket, 200L drum or special container.

The versatile Scanrex HVP series can be used either as a manual system or a PLC-ready system, ready to be integrated into a master system. If dispensing is required, the pump can be equipped with different kind of dispensing valves.

SCANREX HVP

– One Component System


STANDARD CONFIGURATION

- Pump frame with control box
- Double acting piston pump
- Air motor with reversing valve
- Air bleed valve for the pump body
- Follower plate or pressure plate adapted to material container
- Follower plate seal NEOPRENE*

* Different materials available


OPTIONS

- High pressure material hose PA or PTFE
- Outlet block with manometer
- Material pressure regulator, for a pulsation-free application
- Low-level monitoring
- Various dispensing valves
- Volumetric dosing valve with high accuracy
- Pneumatic operated handle
- "PLC ready" version. Enables connection with a master system
- Pump body of stainless and acid proof steel
- Valve seat/cone of hard metal

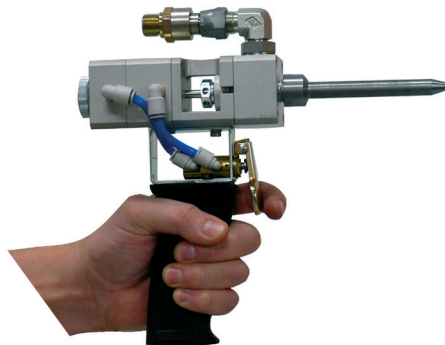

OPTION

Dispensing valve with handle.

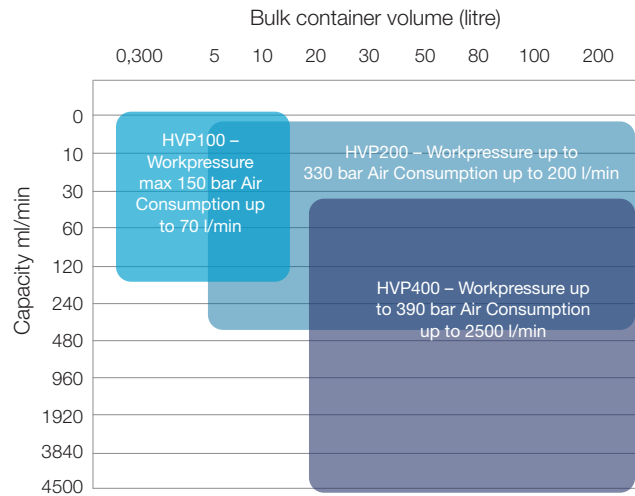

TECHNICAL DATA

	HVP100	HVP200	HVP400
Material container	310ml up to 15L	5L up to 200L	20L up to 200L
Pressure ratio	25:1	35:1 55:1	50:1 65:1
Capacity	Up to 140ml/min	Up to 450ml/min	Up to 4400ml/min
Measurements W/L/H (standard config.)	350x280 x1300mm	640x450 x1120/1610mm	1100x1250 x3000mm
Weight (standard config.)	20kg	60kg	300kg
Noise level	<70 dB (A)	<70 dB (A)	<70 dB (A)

All data and characteristics mentioned in this booklet are by way of example only. Given flow capacities and material pressure are depending of; inlet air pressure, material viscosity, the hose dimensions and other equipment fitted after the pump outlet. Applicator Group reserves the right to modify the products without prior notice.



APPLICATOR SYSTEM AB, Division SCANREX

Prästängsvägen 12
SE-452 33 Strömstad, Sweden
Telephone: +46 31 750 30 00
www.aplicatorgroup.com
info@aplicator.se

Branch offices; Applicator System AB
Denmark info@aplicator.dk
Finland info@aplicator.fi
Spain info@aplicator.es
U.K info@aplicator.co.uk